

FlexPackPRO[®]

Thermal Transfer Overprinting

130 SERIES

32mm TTO Coders




RUGGED

- Built with 7000 series aircraft-grade treated aluminum alloy and stainless steel.
- Vertically-integrated parts manufacturing to ensure quality control and precision assembly.
- Heavy-duty installation brackets and rollers crafted in-house to customer specifications.
- Robust long-life mechanical design requiring zero preventative maintenance.

RELIABLE

- Clutchless ribbon drive and tension control design maximize uptime and long-term performance.
- Superior Festo[®] pneumatics assure image quality control & longer printhead life.
- Precision printhead assembly requires lower air pressure to achieve highest print quality.
- 300dpi Kyocera[®] printheads on self-leveling mounts provide superior code quality through every run.

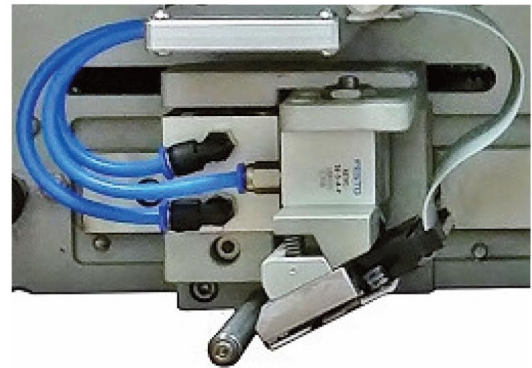

VALUE

- Color LCD touchscreen controllers with WYSIWYG print preview come standard with all models.
- Full-featured, highly-intuitive ProCode[®] image design software comes free with all systems.
- Reasonably-priced ribbons, parts and service provide the industry's lowest total cost of ownership.
- On average, complete FlexPackPRO systems list for 25-40% lower than competitive TTO systems of comparable quality.

Rugged. Reliable. Value.[™]

FlexPackPRO[®] 130 SERIES

Thermal Transfer Overprinting

Models:	130i	130i-hp	130c	130c-hp	130iXT / 130cXT
Printer Mode:	Intermittent	Intermittent	Continuous	Continuous	Intermittent / Continuous
Maximum Print Area (Width x Length):	32 x 50 mm (1.3" x 2")	32 x 70 mm (1.3" x 2.8")	32 x 125 mm (1.3" x 5")	32 x 125 mm (1.3" x 5")	32mm x 76mm / 125mm (1.3" x 3" / 5")
Print Resolution:	300 dpi	300 dpi	300 dpi	300 dpi	300 dpi
Max Print Speed:	400 mm/s (15.7 in/s)	400 mm/s (15.7 in/s)	400 mm/s (15.7 in/s)	400 mm/s (15.7 in/s)	400mm/s / 600mm/s (15.7 in/s / 23.6 in/s)
Print Gap:	0.5 mm (0.02")	0.5 mm (0.02")	0.5 mm (0.02")	0.5 mm (0.02")	0.5 mm (0.02")
Standard Ribbon Width:	35 mm (1.4")	35 mm (1.4")	35 mm (1.4")	35 mm (1.4")	35 mm (1.4")
Maximum Ribbon Length:	680 m (2,230')	680 m (2,230')	680 m (2,230')	680 m (2,230')	1,000m (3,280')
Ribbon Saver Features:	Yes	Yes	Yes	Yes	Yes
Ribbon Loading:	Direct (Non-Cassette)	Integrated Cassette	Direct (Non-Cassette)	Integrated Cassette	Integrated Cassette
Standard User Interface:	4.3 inch color LCD touchscreen	4.3 inch color LCD touchscreen	4.3 inch color LCD touchscreen	4.3 inch color LCD touchscreen	7" Color Touchscreen (stainless)
Software:	ProCode™ Professional	ProCode™ Professional	ProCode™ Professional	ProCode™ Professional	ProCode™ Professional
Barcodes:	All	All	All	All	All
Standard Communication:	USB, Ethernet, RS232	USB, Ethernet, RS232	USB, Ethernet, RS232	USB, Ethernet, RS232	USB, Ethernet, RS232
Printer Dimensions (Height x Width x Depth):	175 mm x 190 mm x 200 mm (6.89" x 7.48" x 7.87")	180 mm x 220 mm x 222 mm (7.09" x 8.66" x 8.74")	175 mm x 190 mm x 200 mm (6.89" x 7.48" x 7.87")	180 mm x 220 mm x 222 mm (7.09" x 8.66" x 8.74")	180 mm x 265 mm x 240 mm (7.09" x 10.43" x 9.45")
Printer Weight:	5.6 kg (12.3 lbs)	9.4 kg (20.7 lbs)	5.6 kg (12.3 lbs)	9.4 kg (20.7 lbs)	10 kg (22 lbs)
Power Supply:	110 - 120 / 200 - 240 VAC, 50 / 60 Hz	110 - 120 / 200 - 240 VAC, 50 / 60 Hz	110 - 120 / 200 - 240 VAC, 50 / 60 Hz	110 - 120 / 200 - 240 VAC, 50 / 60 Hz	110 - 120 / 200 - 240 VAC, 50 / 60 Hz
Air Supply:	3 bar / 44 psi (max)	3 bar / 44 psi (max)	3 bar / 44 psi (max)	3 bar / 44 psi (max)	3 bar / 44 psi (max)
Operating Temperature:	5° - 50° C (41° - 122° F)	5° - 50° C (41° - 122° F)	5° - 50° C (41° - 122° F)	5° - 50° C (41° - 122° F)	5° - 50° C (41° - 122° F)

FlexPackPRO[®]

Thermal Transfer Overprinting

CORPORATE LOCATIONS
 GEORGIA | ILLINOIS | NEW JERSEY

(800) 758-9219
gopro@flexpackpro.com
www.flexpackpro.com



MARKTEC[™]
 Automated Marking, Labeling & Packaging Systems

8785 Ag Park Drive North
 Batavia, NY 14020

Tel: 1-800-627-5832 | Fax: 585-344-4109

www.marktecprods.com

